


Specifications for CV-M536/M538/M539

Specifications	CV-M536/M538/M539C	CV-M536/M538/M539E
Scanning system	625 lines 25 frames sec.	525 lines 30 frames sec.
CCD sensor	Monochrome 1/2" Hyper HAD IT CCD	
Sensing area for video	6.5 mm (h) x 4.8 mm (v)	
Picture elements effective	752 (h) x 582 (v)	768 (h) x 494 (v)
Elements in video out	737 (h) x 572 (v)	758 (h) x 484 (v)
Cell size	8.6 (h) x 8.3 (v) μm	8.4 (h) x 9.8 (v) μm
Resolution (horizontal)	560 TV lines	570 TV lines
Resolution (vertical)	570 TV lines	480 TV lines
Sensitivity	0.5 Lux, F1.4	
S/N ratio	>56 dB (AGC off, Gamma 1)	
Video output	Composite VBS signal 1.0 Vpp, 75 Ohm	
Gamma	0.45 - 1.0	
Gain	Manual - automatic. 0 to +15 dB	
Scanning	2:1 interlace - non-interlace	
Accumulation	Field - frame	
Synchronization	int. X-tal. Ext. HD/VD or random trig.	
HD sync. input/output	4V, 75 Ohm*	
VD sync. input/output	4V, 75 Ohm*	
Trigger input	4V, 75 Ohm*	
WEN out (Write Enable)	4V, 75 Ohm	
EEN out (Exposure Enable)	4V, 75 Ohm	
Pixel clock output (optional)	4V, 75 Ohm, sine	
Internal shutter	Off, 1/100, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10,000 sec.	
Trigger shutter	1/60, 1/125, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10,000 sec.	
Ext. continuous variable shutter	1/77 to 1/10,000 sec. (trigger mode 2)	
Long time exposure	1 field to (Ext. VD pulse interval)	
Operating temperature	-5°C to +45°C	
Humidity	20 - 80% non-condensing	
Power	12V DC $\pm 10\%$. 3.6W (M536), 3.3W (M538/M539)	
Dimensions (control unit)	40 x 50 x 80 mm (HxWxD)	
Weight (control unit)	210 g	
Dimensions (camera head)	$\varnothing 17 \times 60$ mm (536)	
Dimensions (camera head)	$\varnothing 17 \times 95$ mm (538, 539)	
Weight (camera head)	10 g (536), 15 g (538, 539)	
Lens mount	M15.5 x 0.5	

*) HD sync. VD sync./Trigger in or out by internal straps. Inputs TTL or 75 Ohm terminated by internal straps.


Switch Setting

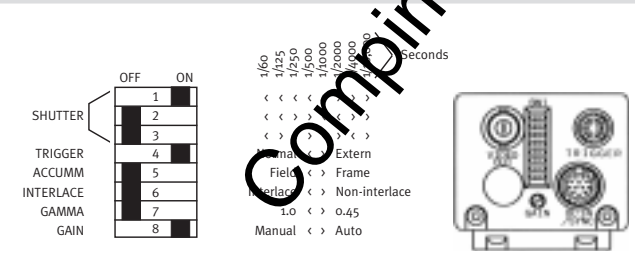


Ordering Information

- CV-M536 1/2" Monochrome Remote Head Camera CCIR/EIA 2 m Cable
- CV-M538 1/2" Monochrome Remote Head Camera CCIR/EIA 5 m Cable
- CV-M539 1/2" Monochrome Remote Head Camera CCIR/EIA 10 m Cable
- OP-735 Special Lens 7.5 mm

Connection Description







- Pin 1 Ground
 2 +12V DC
 3 Ground
 4 Video output
 5 Ground
 6 HD in/HD out
 7 VD in/VD out
 8 Ground
 9 N.C. Y/Pixel clock out
 10 Ground
 11 +12V DC
 12 Ground





- Pin 1 N.C.
 2 EEN output
 3 Ground
 4 N.C.
 5 Trig. input
 6 WEN pulse output

Dimensions



Camera Head Dimensions

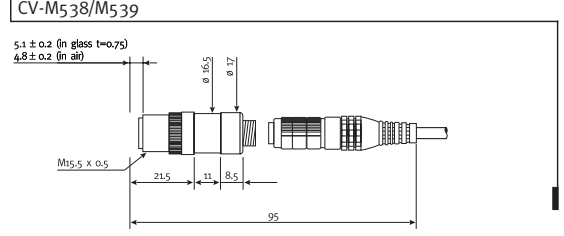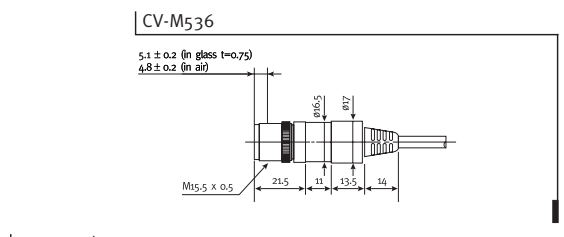

JAI Corporation, Japan
 German Industry Center
 1-18-2 Hakusan, Midori-ku
 Yokohama,
 Kanagawa 226-0006, Japan
 Phone +81 45 933 5400
 Fax +81 45 931 6142
 www.jai-corp.co.jp

JAI A-S, Denmark
 Camera Solutions
 Produktionsvej 1, 2600 Glostrup
 Copenhagen, Denmark
 Phone +45 4491 8888
 Fax +45 4491 8880
 www.jai.dk

JAI UK Ltd., England
 Audley House
 Northbridge Road
 Berkhamsted
 Herts HP4 1EH, England
 Phone +44 1442 879 669
 Fax +44 1442 879 281

Costar, USA
 43517 Ridge Park Drive
 Temecula, CA 92590
 United States of America
 Phone +1 909 699 9000
 Fax +1 909 308 9188
 www.costar-usa.com



THE MECHADEMIC COMPANY

Visit our web site on www.jai.dk

Company and product names mentioned in this datasheet are trademarks or registered trademarks of their respective owners. JAI A.S. cannot be held responsible for any technical or typographical errors and reserves the right to make changes to products and documentation without prior notification.

31007271.01.99.4000.4280